


PICO

ULTRA-MINIATURE

Surface Mount Audio Transformers

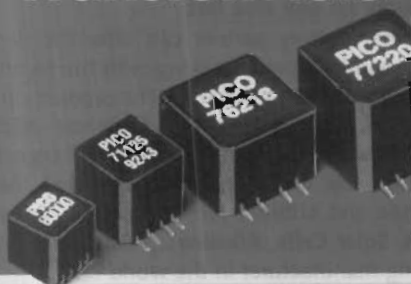

Low Profile
.2" Ht.

- Manufactured and tested to MIL-T-27
- Frequency range 20 Hz to 250 KHz
- Available from 100 milliwatts to 3 watts
- Impedance from 20 ohms to 100 K ohms
- Operating temperature -55°C to +130°C
- Low profile, .2" ht.

PICO surface mount units utilize materials and methods to withstand extreme temperature (220°C) of vapor phase, I.R., and other reflow procedures without degradation of electrical or mechanical characteristics.

Delivery—
stock to one week

See EEM
or send direct
for **Free PICO Catalog.**

Call toll free **800-431-1064**
in NY call **914-699-5514**
FAX **914-699-5565**

PICO Electronics, Inc.

453 N. MacQuesten Pkwy., Mt. Vernon, N.Y. 10552


CIRCLE NO. 12

EDN


DESIGN FEATURE

OP AMPS AND CAPACITIVE LOADS


FIGURE 9

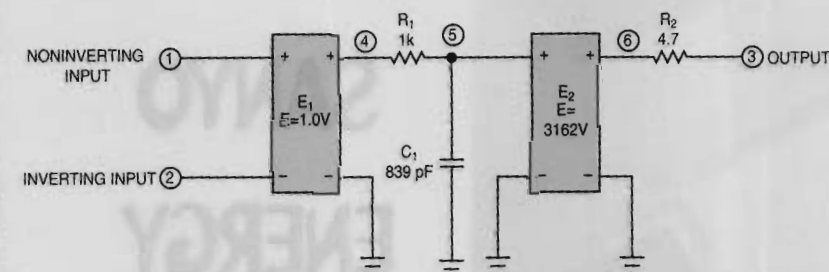

(a) L2726_sim

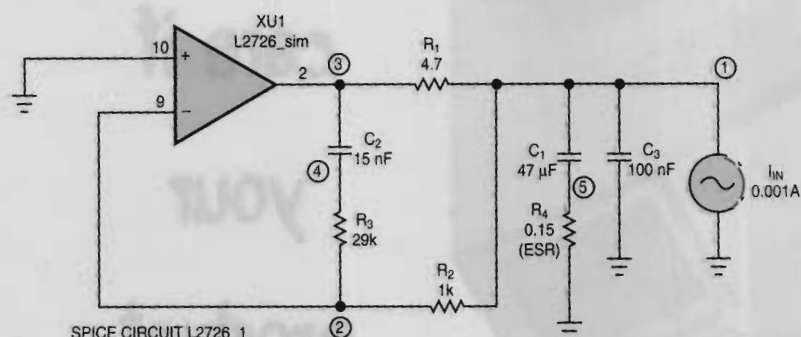

(b)

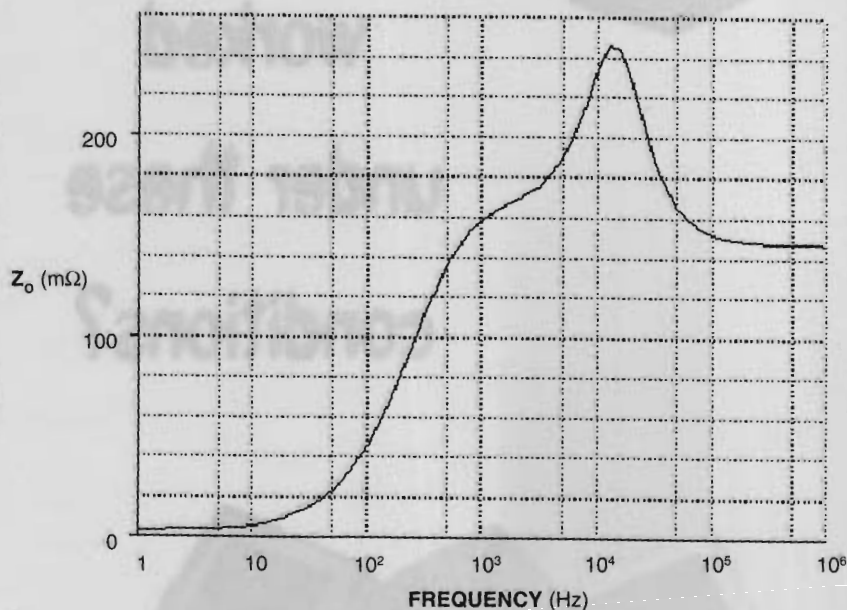

(c)

The author used the circuit in (a) to simulate the L2726 power op amp. The circuit in (b) reduces the L2726's already low output impedance by a factor of 30. The graph (c) shows how the output impedance of the circuit in (b) varies as a function of frequency.